



THE BEST SOLUTION FOR AGRICULTURE

MISTBLOWER ATM 3PCG

TECHNICAL FEATURES:


- HOT GALVANISED FRAME
 - POLYETHYLENE TANK
 - HAND WASHING TANK
 - INTEGRATED SYSTEM CLEANING TANK
 - DIAPHRAGM PUMP WITH VALVE
 - REMOTE CONTROLLED PRESSURE REGULATOR
 - HYDRAULIC AGITATOR
 - SUCTION FILTER WITH ANTI-EMPTYING VALVE
 - ORIENTATING CHECK VALVE NOZZLES
 - Ø 450 AIR CONVEYOR
 - WHEELS SIMPLE OR DOUBLE
 - 2 SPEEDS
 - TRANSMISSION WITH NEUTRAL
 - CLUTCH
 - HYDR. HORIZONTAL MOVEMENT 90°
 - HYDR. VERTICAL MOVEMENT 270°
 - DEFLECTORS
 - REAR BUMPER PROTECTION
- APPLICABLE FANS:

SIMPLE WHEEL


- HORIZONTAL RANGE MT. 35
- VERTICAL RANGE MT. 20
- POWER ABSORPTION HP 60

DOUBLE WHEELS

- HORIZONTAL RANGE MT. 45
- VERTICAL RANGE MT. 25
- POWER ABSORPTION 100 HP

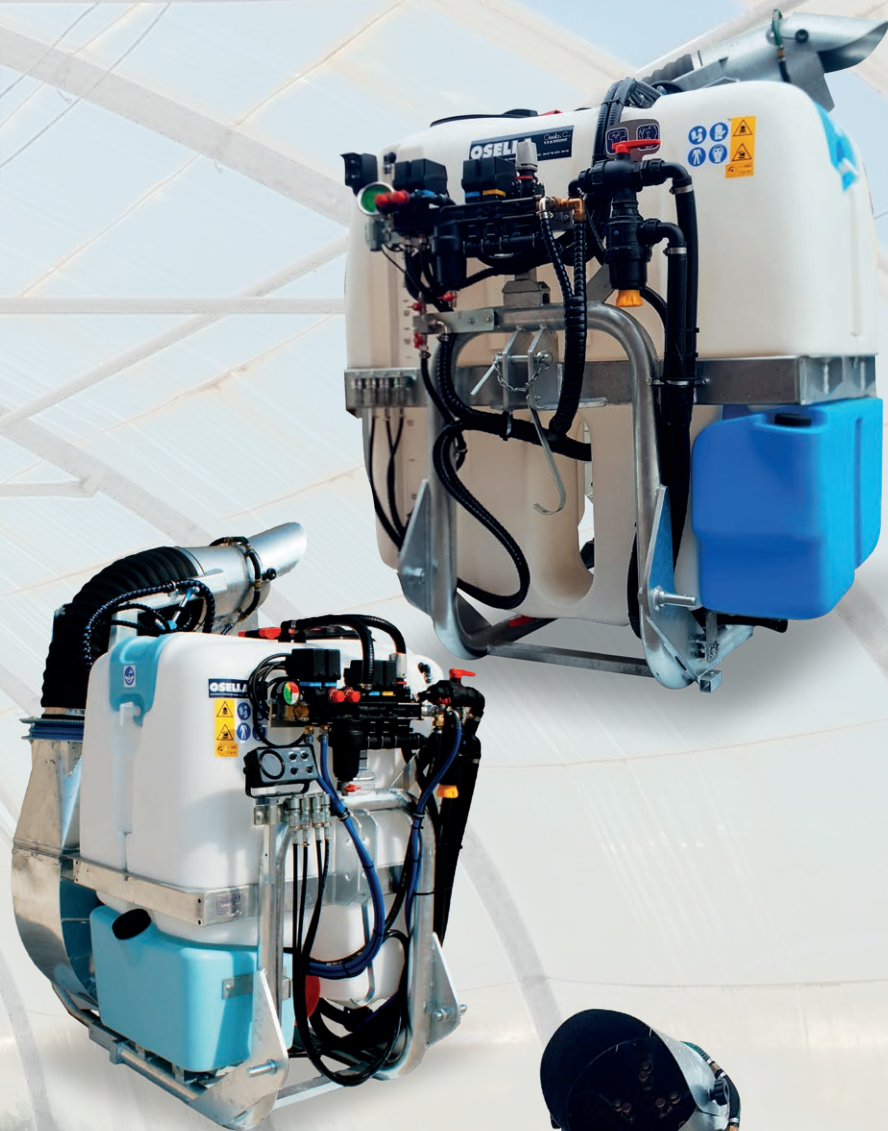

ACCESSORIES ON REQUEST

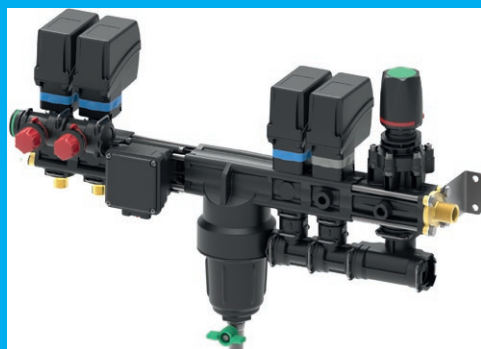

ELECTRIC PRESS. REGUL.



HYDR. POWDER MIXER ASSEMBLY ON THE FILTER



TANK RINSING NOZZLE KIT



LIGHTING LED KIT





HOSE REEL



TURBO SPRAY GUN

Mistblower brought to the third point, suitable for treatments on plants and pest control. Thanks to its powerful rotating and tiltable gun, it is possible to dispense the product precisely and uniformly on the area to be treated. Possibility of 360° horizontal and 90° vertical hydraulic displacement of the gun head. The 3PCG ATM Mistblower stands out for the quality of its components, its sturdy frame, and the possibility of configuring it with numerous accessories in full compliance regulations as the safety and protection of the environment. Fan assemblies can be single or double impeller with double speed multipliers and neutral point and centrifugal clutch. Mistblowers are configurable with a wide range of high-pressure pumps. Available in the 400, 500, 600, 800, 1000, 1200 litre version

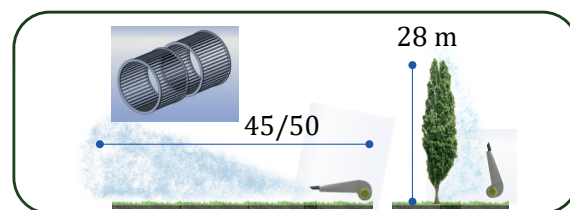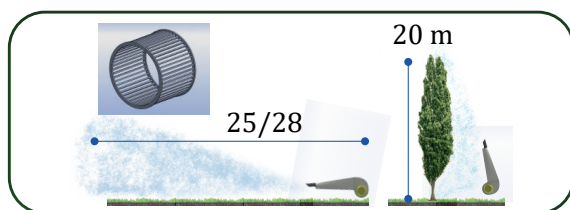

400 Lt.



n° 1



Ø450



105Lt/min - 116Lt/min



2+N



≥ 60 Cv



L=100cm P=130cm H=194cm



356 Kg.

500 Lt.

n° 1 - 2

Ø450

105Lt/min - 116Lt/min

2+N

≥ 70 Cv

L=115cm P=165cm H=194cm

426 Kg.

600 Lt.

n° 1 - 2

Ø450

105Lt/min - 116Lt/min

2+N

≥ 70 Cv

L=115cm P=165cm H=194cm

432 Kg.

800 Lt.

n° 2

Ø450

105Lt/min - 116Lt/min

2+N

≥ 80 Cv

L=150cm P=170cm H=194cm

551 Kg.

1000 Lt.

n° 2

Ø450

105Lt/min - 116Lt/min

2+N

≥ 90 Cv

L=150cm P=170cm H=194cm

561 Kg.

1200 Lt.

n° 2

Ø450

105Lt/min - 116Lt/min

2+N

≥ 90 Cv

L=150cm P=170cm H=194cm

576 Kg.



Follow Us



OSELLA & C srl
 Via Vittoria n°2 26038 Torre de' Picenardi (CR) TEL. +390375-394105
 E-mail: info@osellasrl.it website: www.osellasrl.it